


On-prem Appliance Specification Sheet

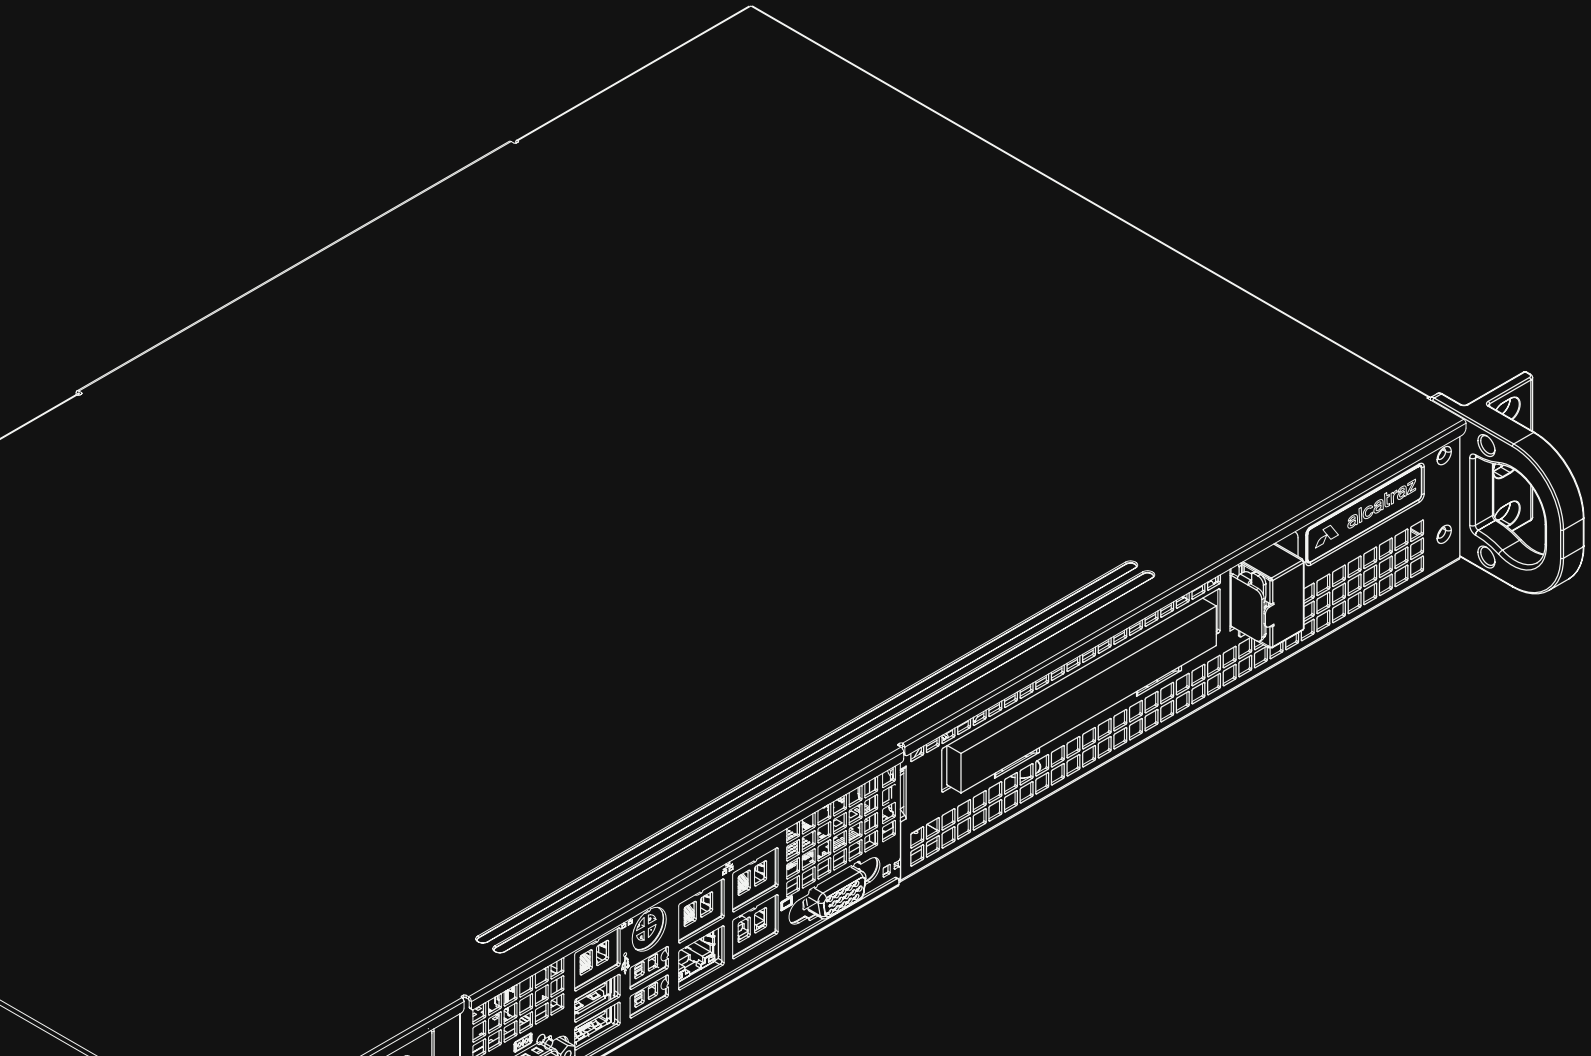

The Alcatraz AI Appliance brings the power of the Alcatraz Administration Portal out of the cloud and into the customer's IT infrastructure. Customers can manage devices, users and profiles from the easy to use browser based interface on PCs or mobile device on their network.

Key Features

Preloaded and configured with Alcatraz's Administration Portal software

Easy to to install

Compatible with all current and future Alcatraz products

Specifications

System	Software	Alcatraz Administration Portal
	Operating System	Windows Server 2019 with Hyper-V (CentOS)
	Network Connection	1 GbE
	Network Interface	2 × 1 GbE RJ-45 ports (1000Base-T)
	Video Outputs	None
	Local Viewing	Initial system configuration
	Out-of-band management	IPMI
Mechanical	Form Factor	1U rack mount chassis
	Dimensions (LxWxH)	1.7" x 17.2" x 9.8" (43mm x 437mm x 249mm)
	Weight	12lbs (3.63kg)
Electrical	Power Input	100 to 240 V AC, 50/60 Hz, auto-switching
	Power Supply	200W Low Noise AC-DC power supply with PFC
	Power Consumption	2.6 Amp Max
Environmental	Operating Temperature	10°C to 35°C (50°F to 95°F)
	Storage Temperature	-40°C to 65°C (-40°F to 149°F)
	Humidity	10% to 80% relative humidity with 29°C (84.2°F) maximum dew point



Specifications

Supplied Accessories	Bezel	1, front
	Power Cords	1
Certifications	Safety	CSA/EN/IEC/UL 60950-1 Compliant, UL or CSA Listed (USA and Canada), CE Marking (Europe)
	Electromagnetic Emissions	FCC Class A, EN 55032 Class A, EN 61000-3-2/3-3, CISPR 32 Class A
	Electromagnetic Immunity	EN 55024/CISPR 24, (EN 61000-4-2, EN 61000-4-3, EN 61000-4-4, EN 61000-4-5, EN 61000-4-6, EN 61000-4-8, EN 61000-4-11)
	ROHS	EN 50581:2012

Outline Dimensions

